


22 Years of Automation
Excellence and Reliability!

XLR-8₆₀ Extended Rack Autosampler

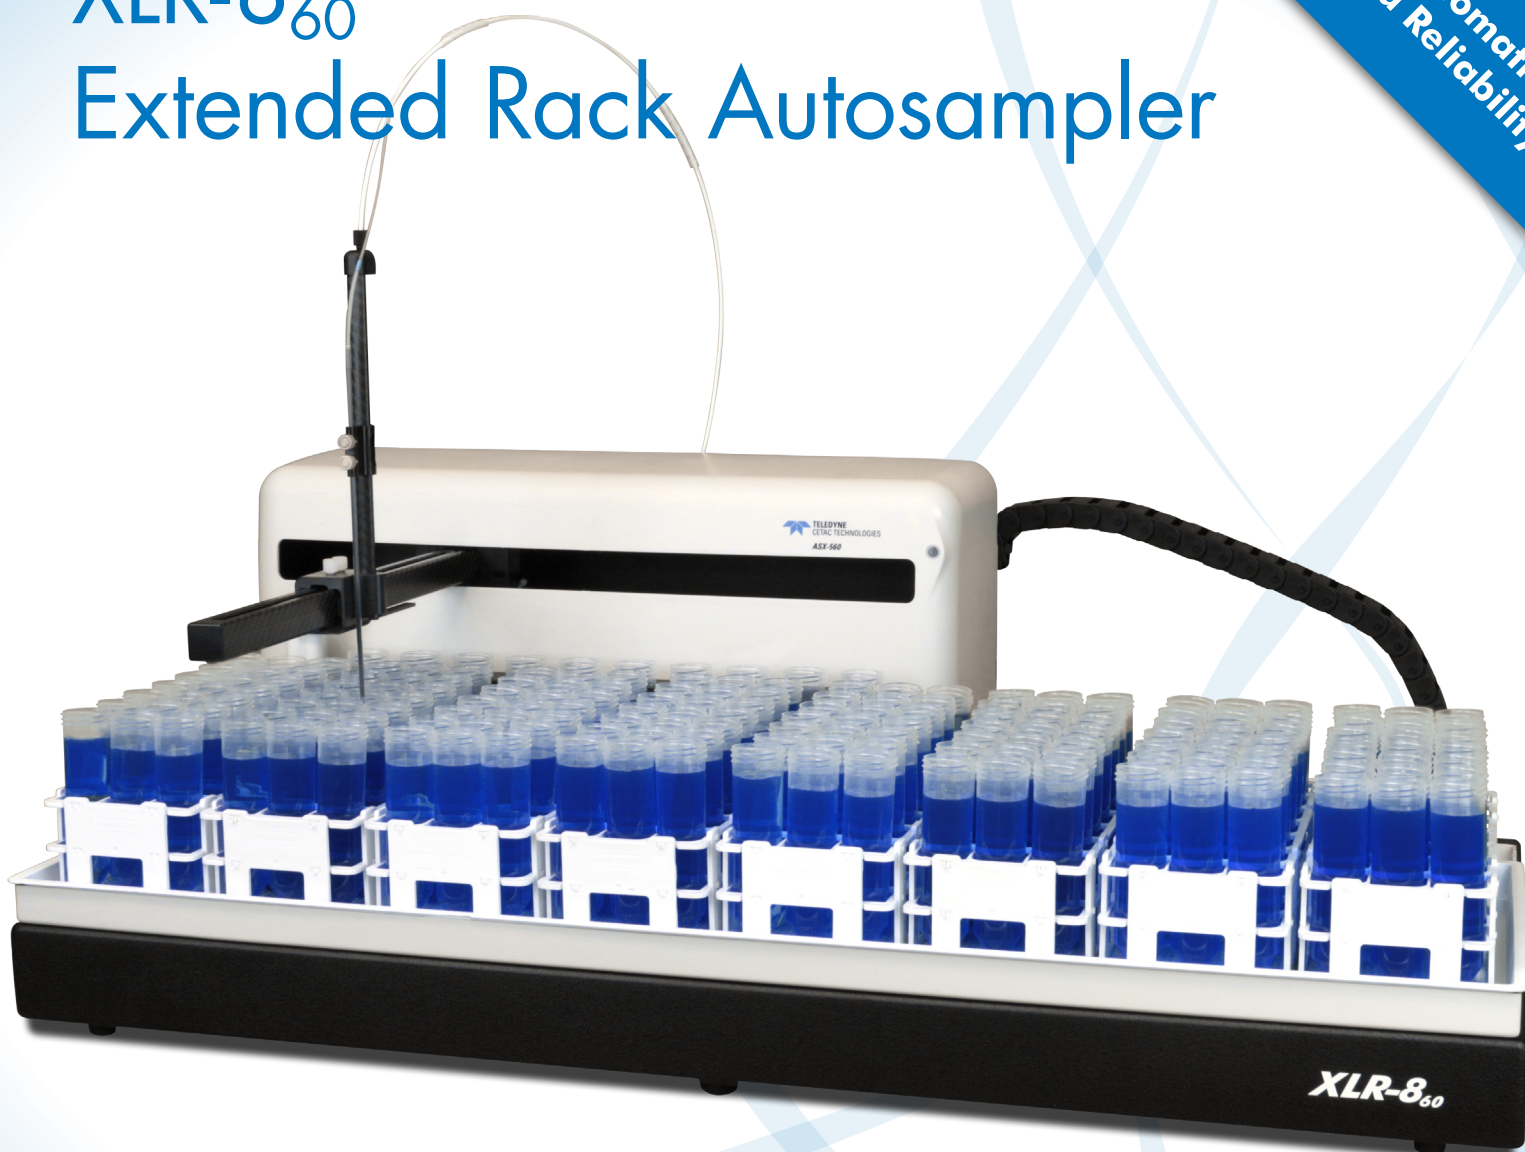

Perfecting the Standard


More features and improved performance define the next generation of autosampler from Teledyne CETAC Technologies. The XLR-8₆₀ Extended Rack Autosampler builds upon the reliability of its predecessors with latest generation electronics, improved accessory interfaces, enhanced pumping capabilities, easier serviceability and a sleek new design!

The XLR-8₆₀ keeps the durable features of prior Teledyne CETAC autosamplers which have proven their worth in tens of thousands of laboratories and countless hours of operation. The enhanced features of the XLR-8₆₀ mean that it is ready to tackle an even wider range of analytical techniques and environments, including AA, ICP, ICP-MS, TOC, UV-VIS, fraction collection, liquid handling, and more.



XLR-8₆₀ Autosampler

Proven Reliability, Improved Performance and Longevity

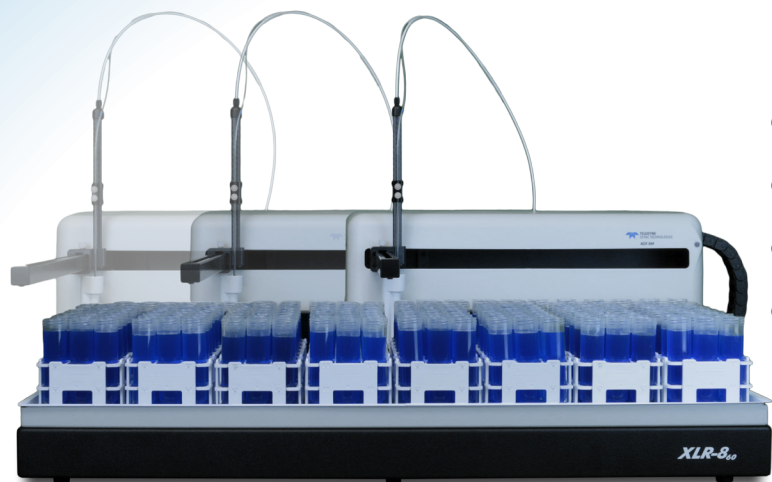

- Durable, reliable – 2 year warranty
- Better chemical compatibility
- Improved pumping and movement
- Refined and configurable XYZ movement

Technical Specifications

Dimensions:

Height: 66.7 cm (26.25") with sample probe

Width: 112 cm (44")

Depth: 55 cm (21.6")

X-Axis: 2x 42.0 cm (16.54")

Y-Axis: 30.0 cm (11.81")

Z-Axis: 15.5 cm (6.10")

Pump: 0 – 80 mL/min

Weight: 20.4 kg (45 lbs)

Tray: 8 rack capacity

Speed:

Axis	Min	Max
X	100 mm/sec	330 mm/sec
Y	73 mm/sec	411 mm/sec
Z	164 mm/sec	476 mm/sec

Autosampler Control Utilities

Autosampler Configuration tool for control of XYZ and pump

Firmware Updater Utility

IQ/OQ and Log Extractor Utilities

Communication Interface

2 Serial (RS-232) ports

USB (virtual COM port)

Power Requirements

100-240 VAC, 47-63 Hz, 1.9A

Options

ASXPRESS® PLUS Rapid Sample Introduction System

Advanced Mechanical Design

- Injection molded parts
 - Better chemical compatibility
 - Improved high resolution applications
- Improved pump technology
 - Quieter
 - Easier tubing replacement options
 - Expanded flow capabilities, 0.1 – 80 mL/min (Conserve expensive rinse solution)
- Improved serviceability and accessory interfaces

Advanced Electronics

- Improved movement profile
 - Quieter
 - Refined and configurable XYZ movement
 - Expanded movement speed options
- Higher resolution positioning
 - Improved accuracy allows for 96-well plates
 - Active resonance control
- Electronic home position alignment
- Improved firmware and configuration utilities
- Backward compatible communications
 - Seamless upgrade path
- Proven technology for reliable performance

Double Your Sample Capacity

A complete 8 rack autosampler that holds up to 720 samples and 10 standards, freeing valuable personnel from the task of manual sample manipulation.